

# Saubere Luft mit ...

# InoxAir®

## CAF & CAF-L



Mehr erfahren:

www.inoxair.de


+49 209 386 20 200

Die **CleanAir-Abluftreinigungsanlage** mit Blaurauchfilter ist eine 3-stufige Abluftreinigungsanlage für die Küchenabluft.

Nach dem Einbau in die Abluftstrecke sowie dem Anschluss des Steuergerätes an eine 230 V Stromversorgung ist die Anlage sofort betriebsbereit.

Mit der Abluftreinigungsanlage von InoxAir® ist es jetzt möglich Fisch, Fleisch, Frittiertes und Gemüse zuzubereiten. Mithilfe der unterschiedlichen Filter werden Fett, Blaurauch und feinste Aerosole sehr effektiv und nahezu vollständig eliminiert.

Bei Küchenbetrieben mit sehr starker Fettbelastung kann eine zweite Elektrofilterreihe eingebaut werden (**CAF-L**).

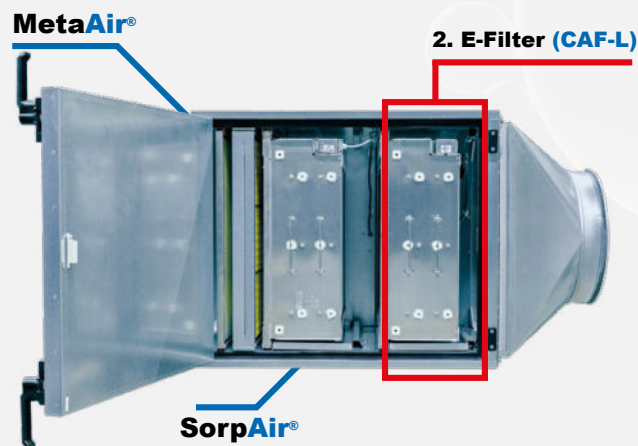

Bestell-Nr.		CAF 3000	CAF 5000	CAF 8000	CAF 12000
<b>Filterleistung</b>	m³/h	2.500	3.750	7.500	10.000
<b>Druckverlust</b>	Pa	235	235	235	235
<b>Spannung</b>	V/Hz	230/50	230/50	230/50	230/50
<b>Leistung</b>	W	16	25	50	64
<b>Stutzen</b>	Ø	400	500	600	710
<b>Maße (B x T x H)</b>	mm	827 x 695 x 695	827 x 999 x 695	827 x 999 x 1.319	827 x 1.319 x 1.319
<b>Gewicht</b>	kg	ca. 80	ca. 130	ca. 185	ca. 235

**CAF-L: die technischen Daten sind identisch mit der CAF außer Leistung und Gewicht:**

Bestell-Nr.		CAF-L 3000	CAF-L 5000	CAF-L 8000	CAF-L 12000
<b>Leistung</b>	W	32	50	100	128
<b>Gewicht</b>	kg	ca. 100	ca. 160	ca. 245	ca. 310

Technische Änderungen vorbehalten

**ABLUFTRREINIGUNGSANLAGE  
MIT BLAURAUCHFILTER**

## CAF & CAF-L

**3-STUFIGE  
ABLUFTRREINIGUNG**

Saubere Luft mit ...  
**InoxAir®**

# Saubere Luft mit ... InoxAir® CAF & CAF-L




Learn more:

[www.inoxair.de](http://www.inoxair.de)

+49 209 386 20 200

The **CleanAir extract air purification system** with blue smoke filter is a 3-step extract air purification system for commercial kitchens. After installation in the exhaust air section and connection of the control device to a 230 V power supply, the system is immediately ready for operation. The InoxAir® extract air purification system enables trouble-free preparation of fish, meat, fried food and vegetables. The use of different filters enables extremely effective and almost complete filtration of grease, blue smoke and the finest aerosols.

For kitchen operations with very heavy grease loads, a second electrostatic precipitator series can be installed. **(CAF-L)**

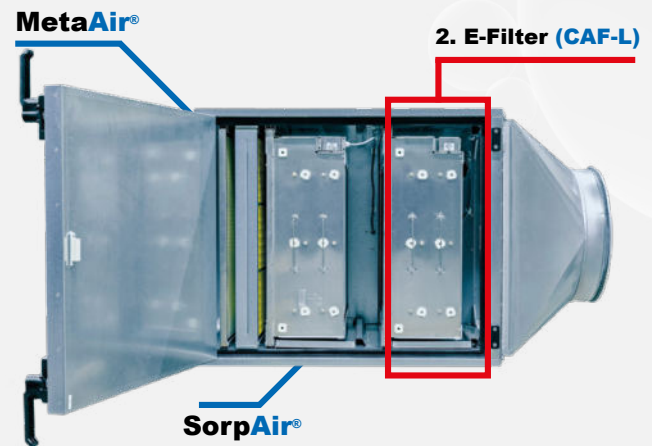

Order no.		CAF 3000	CAF 5000	CAF 8000	CAF 12000
Filter performance	m³/h	2.500	3.750	7.500	10.000
Pressure loss	Pa	235	235	235	235
Voltage	V/Hz	230/50	230/50	230/50	230/50
Power	W	16	25	50	64
Socket	Ø	400	500	600	710
Dimensions (WxDxH)	mm	827 x 695 x 695	827 x 999 x 695	827 x 999 x 1.319	827 x 1.319 x 1.319
Gewicht	kg	ca. 80	ca. 130	ca. 185	ca. 235

**CAF-L: the technical data is identical to the CAF except for power and weight:**

Order no.		CAF-L 3000	CAF-L 5000	CAF-L 8000	CAF-L 12000
Power	W	32	50	100	128
Weight	kg	ca. 100	ca. 160	ca. 245	ca. 310

Subject to technical changes

**EXTRACT AIR PURIFICATION SYSTEM  
WITH BLUE SMOKE FILTER**

**CAF-L**  
3-STAGE  
EXTRACT AIR PURIFICATION

Saubere Luft mit ...  
**InoxAir®**